



The RAPIDO range is the ideal solution for small office and home systems (SOHO) requiring over voltage and mains failure protection. The compactness, versatility (a push-button switch with LED-based mimic panel and user-replaceable batteries) and functionality of the RAPIDO allow it to easily fit into any small office and home environment.

When the mains fails, connected loads are powered with a pseudo sine wave supply from the inverter. For additional security users can download a version of the Watch&Save 3000 UPS monitoring and control software.

Load Configurator

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

* Average estimated value

** Use the Rapido filtered power output

Characteristics

- Maximum compactness
- 3 sockets with mains fail protection
- 1 socket with filtering for powering loads such as laser printers
- Integrated protection for telephone line/modem
- Cold start capability: the UPS can power up without a mains supply present
- User replaceable batteries
- USB interface
- Can be placed on a desktop, floor, or be wall-mounted
- Input supply and telephone cable included
- Short-circuit protection
- Auto restart (on mains return, after batteries have discharged)
- GS/TÜV marks
- Available with French (2P+T), UK or Schuko sockets

Advanced Communication

- Watch&Save 3000 monitoring and shut-down software for Windows Vista, 2003, XP, 2000, Me, 98, Linux, Mac OS X and Sun Solaris
- Plug and Play function

Application

- Personal Computers

2 – Years warranty



Available Sockets



FRENCH SOCKET



SCHUKO SOCKET




BRITISH SOCKET

Technical data

Models	Rapido 350	Rapido 550
Power	350VA / 225W	550VA / 335W
Input	Rapido 350	Rapido 550
Rated voltage	230 Vac	
Voltage range	188 – 262 Vac	
Frequency	50 / 60 Hz	
Output	Rapido 350	Rapido 550
Voltage on mains operation	230 Vac	
Frequency on battery operation	50 or 60 Hz	
Waveform on battery operation	Pseudo sinewave	
Batteries	Rapido 350	Rapido 550
Type	VRLA, AGM	
Recharge time	6 h	
System	Rapido 350	Rapido 550
Weight (kg)	3	3,1
Dimensions (wdh) (mm)	120 x 320 x 88	
Phone. protection	RJ45 connectors	
Communication	On USB interface	
Safety compliance	EN 62040-1-1 and Directives 72/73 EEC, 93/68 EEC, EN 62040-3	
EMC	EN 62040-2 and Directives 89/336 EEC, 92/31 EEC, 93/68 EEC	
Marks	CE; GS / TÜV	
Operating temperature	0°C / +40 °C, optimal +15°C / +25°C	
Color	Dark grey	
Altitude and relative humidity	6000 meters max. elevation , < 95% non condensing	
Accessories provided	1 x input supply cable, telephone cable	

Details

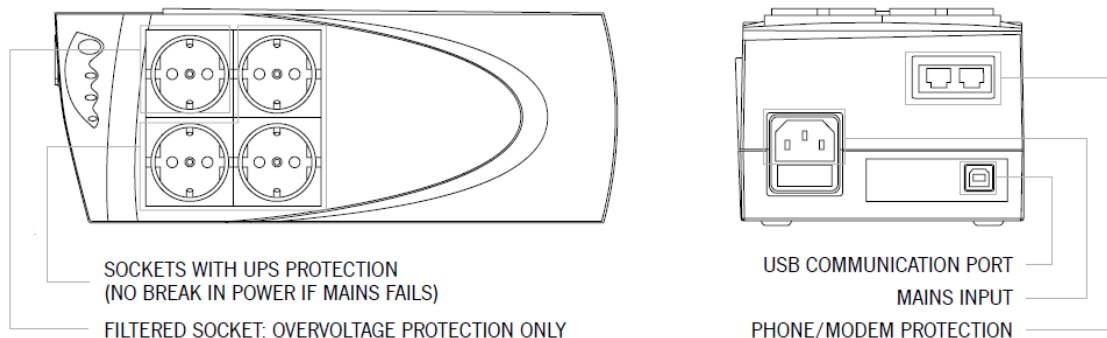

A2B, s.r.o. reserves the right to change any specifications without prior notice.